

FastMag™ Product Line - Installation Instructions

(FastMag[™] 5.56, FastMag[™] Pistol, FastMag[™] Heavy 7.62)

Mounting to MOLLE/PALS webbing systems



Use tabbed FastMag™ model when mounting on MOLLE/PALS systems.

Alternate recommended tools: Flat Head Screw driver, Needle Nose Pliers, or Multi-tool. Slowly apply pressure.



 To detach the straps, pry up from the middle (you can see raised plastic guards that keep the straps from being accidently released).



 Once straps are fed partially through the MOLLE webbing, begin to tuck the "tabs" or "ears" up under the above row of webbing.

(Note: Tabs are slightly angled from the FastMag™ so the magazine will tilt somewhat away from the body for better access.)



 Pull remaining straps through MOLLE webbing to firmly tuck the "tabs/ears" in place.



 Ensure both your "tabs/ears" are tucked underneath MOLLE/PALS webbing and the mounting strap are fed correctly through two rows of webbing.



Pull straps over the locking tabs to secure in place.

(Note: You may use pliers, multi-tool or flat head screw driver to assist in mounting.)

Alternate mounting method





Alternate recommended tools: Flat Head Screw driver, Needle Nose Pliers, or Multi-tool. Slowly apply pressure.

CAUTION: Be careful not to damage the mounting point.

Double stacking FastMags




Use non-tabbed duty belt model when double-stacking FastMags or mounting on duty/rigger belts.

(Note: If double-stacking on MOLLE/PALS system, use "tabbed" FastMag™ model on first row.



 To detach the straps, pry them up from the middle (you can see raised plastic guards that keep the straps from being accidently released).



Remove the belt adapter.



 Using your fingers, internally guide the mounting straps through the slots located on the front of the Fast-Mag™.

(Note: These slots can also accommodate any products using MALICE™ Clips such as nylon admin pouches.)



 Be sure to clear all mounting slots located on the front of the FastMag[™]



 Once the mounting straps are threaded through the slots, align the locking ports located on the back and front of each FastMag[™]



Pull straps over the locking tabs to secure in place.

(Note: You may use pliers, multi-tool or flat head screw driver to assist in mounting.)

CAUTION: Be careful not to damage the mounting point.

Mounting to duty/rigger belts



Mounting to duty/riggers belt



 To detach the straps, pry them up from the middle (you can see raised plastic guards that keep the straps from being accidently released).



Adjust the belt adapter to accommodate width of your belt.

(Note: Belt adapter is optional - Some belts may require removal of belt adapter depending on belt size/type.



Securely lock both straps, being careful to keep the belt and belt adapter held snugly together.



 Duty Belt should now be firmly attached. If not, adjust the belt and adaptor.

(Note: This may require unlocking one or both of the straps.)



PROUDLY SUPPORTING AMERICA'S WARRIORS SINCE 1853

1(800) 969-5908 . 952 South Main Street . Waterbury, CT 06706 sales@itwmilitaryproducts.com

www.facebook.com/itwmilitaryproducts.com www.itwmilitaryproducts.com



Double Stacking FastMag Series



(2) FastMag Heavy (7.62) double stacked.



FastMag Heavy (7.62) and FastMag (5.56) double stacked.



FastMag Heavy (7.62) with (2) FastMag Pistol stacked.



(2) FastMag (5.56) double stacked.



FastMag (5.56) with (2) FastMag Pistol stacked.



Although the ITW FastMag series is primarly used for holding most 7.62 magazines, 5.56 magazines and single/double stacked pistol magazines, the FastMag can also be used to hold other objects such as flashlights, med kits and other objects that fit its profile.

Mounting alternative pouches



Custom nylon applications mounted to FastMag Heavy (7.62) (or) FastMag (5.56) with MALICE® clips.



Standard nylon pistol pouch mounted to FastMag Heavy (7.62) (or) FastMag (5.56) with MALICE® clips.



Standard leather LE pistol patrol pouch mounted to FastMag Heavy (7.62) (or) FastMag (5.56) with MALICE® clips.




Taser holster mounted to FastMag Heavy (7.62) (or) FastMag (5.56) with MALICE® clips.



(2) FastMag Pistol on custom horizontal nylon mount for duty belt.

Mounting right side up on MOLLE webbing

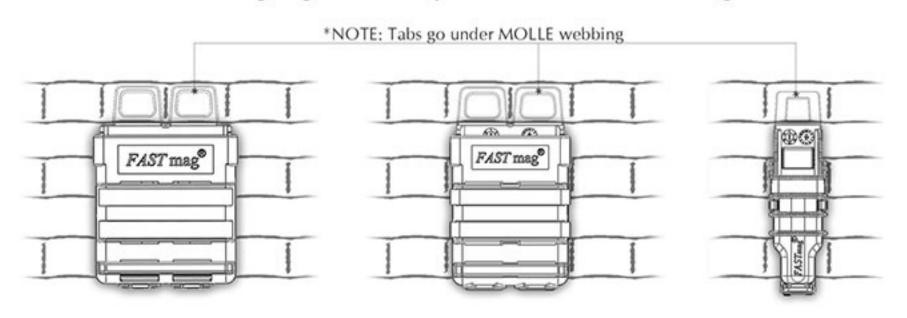

Mounting inverted on MOLLE webbing

